

DALAPRO[®]

EDGE

Extra high-filling ready-mixed hand filler with adhesive effect. For plasterboard joints and cornerbeads & trims.



Superior filling capacity.

One layer less on joints and cornerbeads & trims.

For plasterboard and concrete.

Approved for embedding paper tape.

Nordic Ecolabel, EPD, M1 and IAC Gold.

Patent pending 3943466A1.

DALAPRO[®] EDGE

Extra high-filling ready-mixed hand filler with adhesive effect. For plasterboard joints and cornerbeads.

PRODUCT INFORMATION

Dalapro Edge is a ready-mixed hand filler with extra high filling capacity and adhesive effect that is equally effective on both plaster and concrete. The unique filling properties enable you to save one layer of application on plasterboard joints and cornerbeads & trims. The product also has minimal sinking over time. Dalapro Edge is approved for paper tape and suitable for use on cornerbeads & trims such as Habito, AquaBead and Levelline. Light grey. Nordic Ecolabelled.

The patent process is under way. The technology behind the high filling capacity is protected by Patent Pending until further notice: EP 3943466A1.

USE

Suitable for installing paper tape. Combined with Certain-Teed Marco Joint Tape, the product is suitable for joint filling on plasterboard. Meets CE-marking requirements in accordance with EN 13963. Manufactured in accordance with ISO 9001 and ISO 14001. When finishing plasterboard: follow National guidelines and recommendations in accordance with EN 13969.

INSTRUCTIONS

Apply by hand or with an automatic taping tool to clean, dry and intact surfaces. Fill the entire joint with filler, embed the paper tape and press firmly. Then apply filler directly over the paper tape. After drying, apply filler to the desired surface treatment requirements. When using automatic taping tools: mix before use. Temperature: minimum +5°C. Sand down the filled surface once it has dried. Use sandpaper with grain size 150–220. Eye and respiratory protection are recommended when sanding.

DRYING TIME

The drying time is dependent on factors such as substrate, layer thickness, temperature and humidity.

MATERIAL CONSUMPTION

For joint filling joints on plasterboard: approx. 0.3 litres/ metre.

CLEANING AND DISPOSAL

Remove as much filler as possible from the tools before cleaning them in water. Filler residues must not be poured down the drain, but taken to the local waste disposal centre. Empty packaging completely and recycle it.

STORAGE

Filler has a limited shelf life and is date-marked. Unopened packaging can be kept in a dark place, free from frost, for up to 12 months. Containers that have been opened must be sealed well.

Visit dalapro.com for more information.

TECHNICAL DATA

Binding agent: Latex co-polymer

Solvent: Water

Filler: Microspheres and white dolomite


Grain size: Max. 0.2 mm

pH: Approx. 9

Colour: Light grey

Flammability: Does not spread or support fire

Packaging: 10-litre plastic bucket

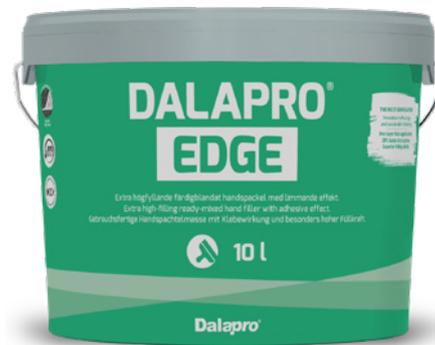

Dalapro Edge 10 litre is packaged in a bucket manufactured mostly of recycled plastic.



This product data sheet is provided for guidance only. The data presented does not constitute a guarantee that the product has certain properties or is suitable for a particular area of application. These values apply under normal circumstances. We reserve the right to make changes without prior notice. Users are responsible for ensuring they use the latest edition of this data sheet. Checks can be made at www.dalapro.com. Last amended 13/09/2023

Saint-Gobain Sweden AB, Scanspac
Kemivägen 7
SE-705 97 Glanshammar
+46 (0)19-46 34 00
dalapro.com
info@dalapro.com