


DALAPRO[®]

ROBUST

Ready-mixed hand filler for surfaces with especially strict demands for hardness and scratch resistance.

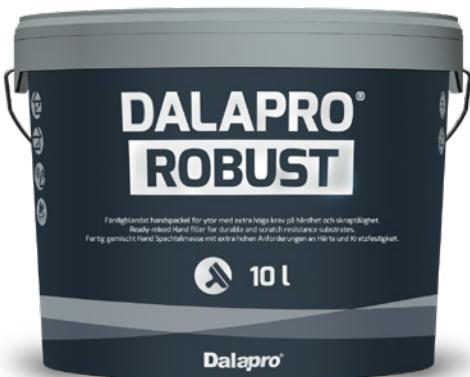

Ready-mixed, grey hand filler for plasterboard, concrete, plaster and previously painted surfaces.

Developed for surfaces where a more hard-wearing surface is required.

Provides superior hardness and scratch resistance.

Approved for embedding paper tape.

Adhesive effect provides optimal reinforcement for paper tape and corner beads.

Dalapro[®]

DALAPRO® ROBUST

Ready-mixed hand filler for surfaces with especially strict demands for hardness and scratch resistance.

PRODUCT INFORMATION

Dalapro Robust is a grey, ready-mixed hand filler for thin smoothing and joint filling with paper tape. The product has been specifically developed for use when a more hard-wearing surface is required, such as in hospitals, schools, corridors and stairwells. Suitable for all common substrates on walls and ceilings indoors. The hardness of the filler minimizes the risk of damage to the surface. The product is also approved for the embedding of corner beads.

USE

Suitable for installing paper tape. Combined with Certain-Tee Marco Joint Tape, the product is suitable for joint filling on plasterboard. Meets CE-marking requirements in accordance with EN 13963. Manufactured in accordance with ISO 9001 and ISO 14001. When treating plasterboard: follow recommendations in accordance with EN 13963.

INSTRUCTIONS

Apply by hand to clean, dry and intact surfaces. Temperature: minimum +10°C. Sand the filled surface down once it has dried. Use sandpaper with grain size 120-150. Eye and respiratory protection are recommended when sanding. Dust off before next treatment. Filled surfaces should be primed before wallpapering.

DRYING TIME

The drying time is dependent on factors such as substrate, layer thickness, temperature and humidity.

MATERIAL CONSUMPTION

Thin smoothing with a 1 mm layer thickness:
approx. 1 litre/square metre.
Joint filling on plasterboard: approx. 0.3 litres/metre.
Adhesion of corner beads: approx. 0.2 litres/metre

CLEANING AND DISPOSAL

Remove as much filler as possible from tools before cleaning them in water. Filler residues must not be poured down the drain, but taken to the local waste disposal center. Empty packaging completely and recycle it.

STORAGE

Filler has a limited shelf life and is date-marked. Unopened packaging can be kept in a dark place, free from frost, for up to 12 months. Containers that have been opened must be sealed well. Visit dalapro.com for more information.

TECHNICAL DATA

Binding agent: Latex co-polymer

Solvent: Water

Filler: Microspheres and white dolomite

Grain size: Max. 0.2 mm

pH: Approx. 9

Colour: Grey

Flammability: Does not spread or support fire

Packaging: 10-litre plastic bucket



Dalapro Robust 10 litre is packaged in a bucket manufactured in 100 % recyclable plastic and consists of at least 90 % recycled plastic.



This product data sheet is provided for guidance only. The data presented does not constitute a guarantee that the product has certain properties or is suitable for a particular area of application. These values apply under normal circumstances. We reserve the right to make changes without prior notice. Users are responsible for ensuring they use the latest edition of this data sheet. Checks can be made at www.dalapro.com. Last amended 25/10/2021